

HOTLINE® is One Diesel Fuel Heater With the Guts to Give you Cold Starts

Hotline® replaces your existing fuel line with a special hose containing a long, flexible, heating element. Powered by 12 or 24 volt DC, it's controlled from a switch on your dash.

Hotline's® technologically advanced heat tape applies up to 600 watts of heat inside the fuel line.

Benefits

- Before starting, the Hotline® can thaw frozen diesel fuel line in just 3 to 5 minutes, using only 2% of available battery capacity, **before** you start your engine.
- On the road simply flip a switch, and within 60 seconds Hotline® will begin eliminating fuel waxing which causes power loss.

Advantages

- Peace of mind with the Hotline®. Gelled fuel thaws within minutes—even if temperatures drop as low as -40°F/C.
- Can work in conjunction with coolant heaters for complete fuel system protection.

Features

- Modular Design allows for easy installation and service.
- Optional Electronic Thermostatic shut-off.

HOTLINE®
ELECTRIC IN-LINE FUEL HEATER

The Diesel Fuel Heater In A Hose



ARCTIC FOX, INC. • P.O. Box 309 • 570 South 7th Street • Delano, Minnesota 55328
1-800-654-5382 • (612) 972-2758 • FAX (612) 972-2873

HOTLINE®

ELECTRIC IN-LINE FUEL HEATER

12 Volt HOTLINE® Kits

	600 WATT	450 WATT	300 WATT	150 WATT
12' / 3.7 m	D3085-1180	D3085-1152	D3085-1138	
8.5' / 2.6m	D3085-1168	D3085-1146	D3085-1133	
6.0' / 1.8m		D3085-1141	D3085-1130	D3085-1126
4.5' / 1.4m			D3085-1128	D3085-1122
2.0' / .6m				D3085-1118

Maximum sustained electrical current draw:

AMP DRAW	45 Amps	31 Amps	21 Amps	10 Amps
----------	---------	---------	---------	---------


Recommended minimum alternator capacity: See note below.

ALTERNATOR	130 Amps	105 Amps	85 Amps	75 Amps
------------	----------	----------	---------	---------

OPTIONAL THERMOSTATIC SHUTOFF KIT for 12 and 24 Volt HOTLINE®

PART NUMBER	SHUTOFF TEMP	TURN ON TEMP	AMP DRAW
D3065-2338	80° F / 26° C	55° F / 12° C	Negligible

12 AND 24 Volt HOTLINE® Kits come complete with all electrical components and wiring harness.

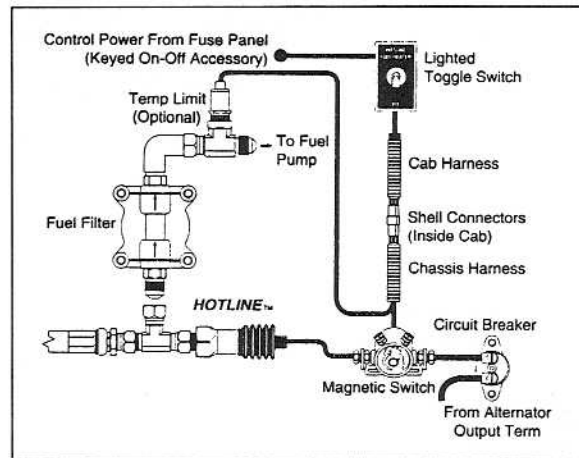

24 Volt HOTLINE® Kits

	600 WATT	450 WATT	300 WATT	150 WATT
12' / 3.7 m	D3085-2180	D3085-2152	D3085-2138	
8.5' / 2.6m	D3085-2168	D3085-2146	D3085-2133	
6.0' / 1.8m			D3085-2130	D3085-2126
4.5' / 1.4m			D3085-2128	D3085-2122
2.0' / .6m				D3085-2118

Maximum sustained electrical current draw:

AMP DRAW	23 Amps	16 Amps	11 Amps	5 Amps
----------	---------	---------	---------	--------

Recommended minimum alternator capacity: See note below.

ALTERNATOR	80 Amps	70 Amps	55 Amps	45 Amps
------------	---------	---------	---------	---------

NOTE: Minimum alternator capacity is only a guideline. Total system load analysis is required for accurate battery/charging system specification. Refer to maximum sustained current draw and consult your vehicle manufacturer for advisement whenever adding any aftermarket auxiliary current load.

U.S. Patent No. 4,372,279

B-583 6/98



ARCTIC FOX, INC. • P.O. Box 309 • 570 South 7th Street • Delano, Minnesota 55328
1-800-654-5382 • (612) 972-2758 • FAX (612) 972-2873

ISO 9001
Registered